

ARKIMEDE 35 - PAVING



INDEX






1. Code Registry
2. Description
3. Use
4. Fields of use
5. Load test
6. Technical specification

1. CODE REGISTRY

Code Adjustable Support	Product	Lenght (mm)	Weight (kg)	Pkg. / Pallet
TER09-1143/4A2M	ARKIMEDE 35 - 4 tabs adjustable support - 2 mm joint	from 35 to 60	0,158	30 pcs. / 1.350 pcs.
TER09-1143/4A4M	ARKIMEDE 35 - 4 tabs adjustable support - 4 mm joint	from 35 to 60	0,158	30 pcs. / 1.350 pcs.

MATERIAL COLOUR

Made of PP (polypropylene).
Black

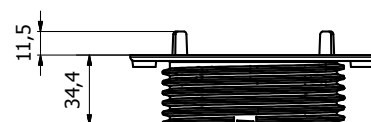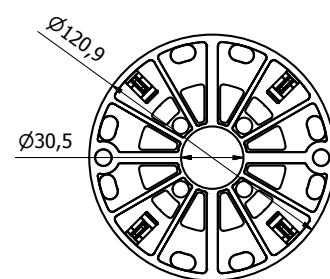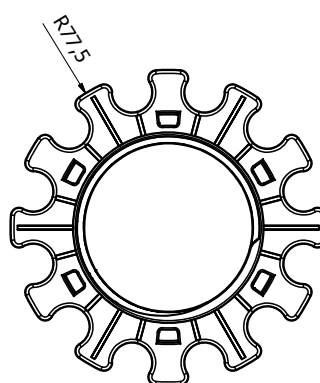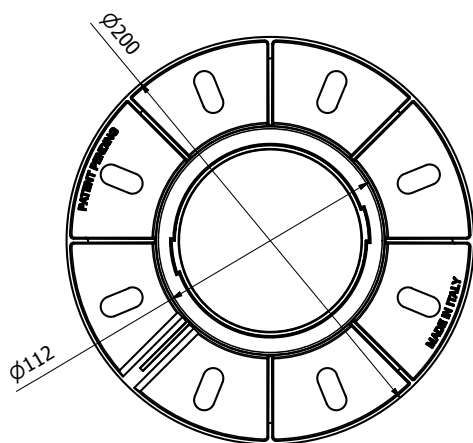

ARKIMEDE 35 - PAVING

2. DESCRIPTION

ARKIMEDE 35 support with adjustable height starting from 35 mm.
 Base laying surface: 314 cm².
 Head diameter: 120 mm with a laying surface of 113 cm².
 Available versions:
 · Box composed by the base, rotating nut and head with 4 spacer tabs of 2 mm thickness.
 · Box composed by the base, rotating nut and head with 4 spacer tabs of 4 mm thickness.
 The base allows the correct water drainage.
 Extension for adjustable support ARKIMEDE 35 with 25, 50, 100 mm height available.

3. USE

Use in outdoor areas, terraces, shared flooring.
 Operating temperature: from - 40 ° C to + 80 ° C


4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

5. LOAD TEST

Code	Dimensions	Max Load [N]
TER09-1143/4Axx	h = 60 mm	10.409
TER09-1143/4Axx	h = 85 mm	9.107
TER09-1143/4Axx	h = 110 mm	10.234
TER09-1143/4Axx	h = 135 mm	9.946
TER09-1143/4Axx	h = 510 mm	9.740

The test was made using a 150mm diameter punch

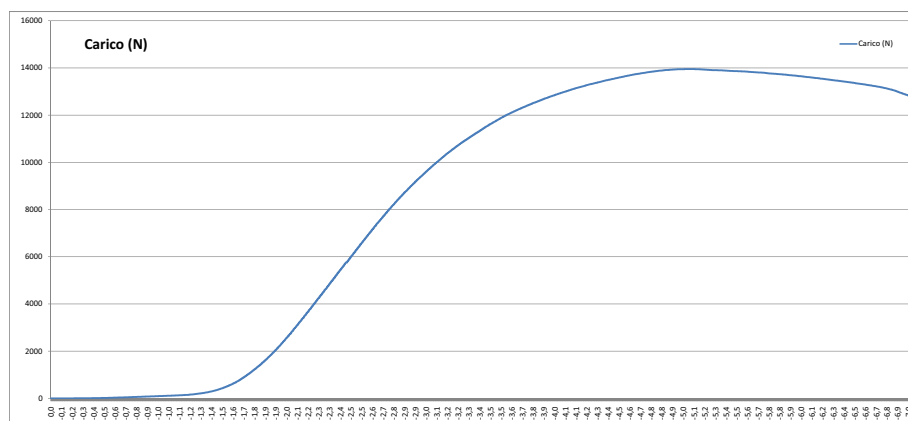

6. TECHNICAL SPECIFICATION

Voice	Description	Unity	Price
Dak.O.TER09-1143/4AxM	Supply and intallation of adjustable support with adjustable height from min 35 to max 500 mm according to the matching accessories. Made of PP (polypropylene). Used in external areas, terraces, pavements	pcs.	-
Dak.O.TER09-1143/4A2M	Arkimede 35 paving - 2 mm joint.....	pcs.	-
Dak.O.TER09-1143/4A4M	Arkimede 35 paving - 4 mm joint.....	pcs.	-