

TAMPA RASA DOURO

Classe B125

CARACTERÍSTICAS	OPCIONAIS	ZONA DE INSTALAÇÃO
-----------------	-----------	--------------------




VEDAÇÃO HIDRÁULICA



LOGO





GRUPO 2 e/ou INFERIORES

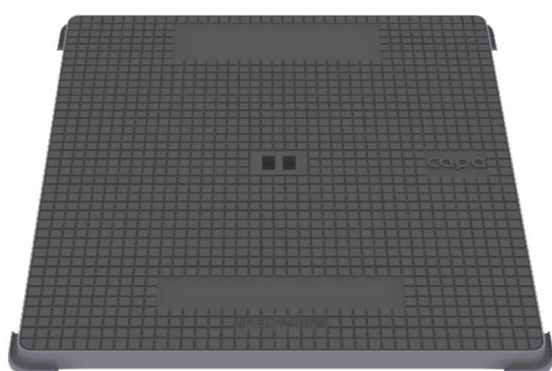

Local de Instalação / Applications

Passeios, zonas para peões, jardins e comparáveis, parques de estacionamento para viaturas ligeiras.

Footway locations and access areas where slow-moving emergency, public service and delivery vans have access and may park (pedestrian precincts, commercial delivery access, refuse collection access, forecourts, paved parking areas).

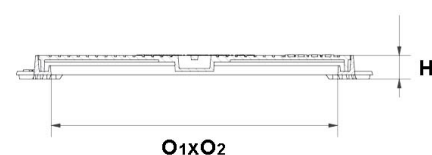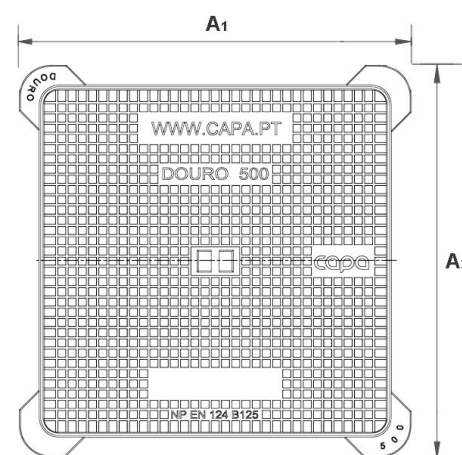

Ref.	Modelo	Dimensões / Dimensions (mm)			Class
		A ₁ X A ₂	H	O ₁ X O ₂	
920112	400	400x400	30	300x300	B125
920113	500	500x500	35	400x400	B125
920114	600	600x600	35	500x500	B125
920115	700	700x700	45	600x600	B125
920116	800	800x800	45	700x700	B125
920117	900	900x900	45	800x800	B125

Características

- Tampa em ferro fundido de grafite esferoidal (dúctil), de acordo com EN-GJS-500-7, EN 1563;
- Conforme NP EN124:1995, classe de carga B125;
- Vedação hidráulica para evitar a passagem de odores;
- Munida de pegas para facilitar içamento da tampa;
- Relevo superficial anti-derrapante;
- Aro otimizado para chumbar no betão envolvente.
- Pintura negra de protecção contra corrosão;

Opcionais: Marcações personalizadas

Features

- Cover made of spheroidal graphite cast iron (ductile), according to EN-GJS-500-7 EN1563;
- According to EN 124:1994, class B125;
- Hydraulic seal to prevent the passage of odors;
- Handles for lifting the cover;
- Raised pattern non-slip;
- Optimized frame to plumb in the surrounding concrete.
- Black painting for corrosion protection;

Optionals: Custom markings